


# **ProTrack**<sup>™</sup> Microcatheter



## **ProTrack** Microcatheter

### FOR EXCELLENT TRACKABILITY

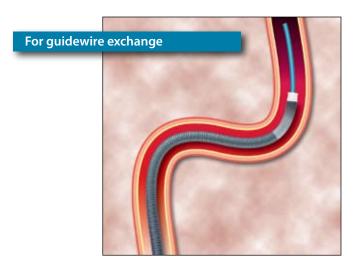



#### **Ideal** for

- Facilitating access to distal, tortuous vasculature over a guidewire
- Infusing diagnostic or therapeutic agents
- · Exchanging guidewires

#### **Key features**

- Excellent trackability
- Excellent infusion rates
- Flexible 10 cm distal end with a radiopaque tip marker
- Low friction PTFE coating
- Removable hub allows for catheter exchange





<b>Specifications</b> — Maximum recommended pressure 250 psi*			
Model	Outer Diameter Inches / French	Inner Diameter Inches	Length cm
CIC 35-145	0.035/2.7	0.024	145
CIC 38-145	0.038/2.9	0.027	145

\* Flow rate of 2.7 mL/s at 37°C, with Mallinckrodt MD76 contrast in 50/50 solution with 0.9% saline.



© Copyright Baylis Medical Company Inc., 2007. Baylis Medical Company Inc. reserves the right to change specifications or to incorporate design changes without notice and without incurring any obligation relating to equipment previously manufactured or delivered. ProTrack and Baylis Medical Company Inc. logo are trademarks or registered trademarks of Baylis Medical Company Inc. in the United States of America and/or other countries.

CAUTION: Federal Law (USA) restricts the use of this device to or by order of a physician.



